






Hernyócsavaros kivitel

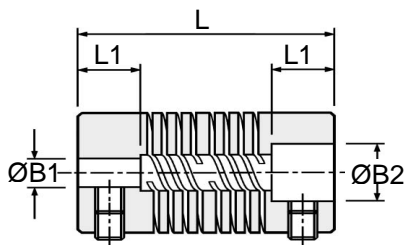


6 bekezdésű kivitel



Hasított kivitel

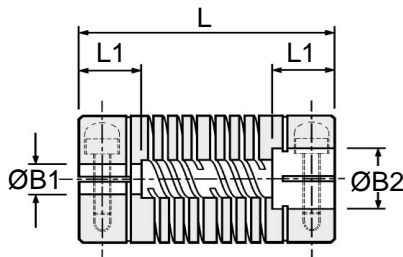

6 bekezdésű kivitel



6 BEKEZDÉSES TENGELYKAPCSOLÓ MÉRETEK

Típus	Cikkszámok		ØD	L	L1	Furat átmérők			Herny. csav.	Szorító csav.	Szög eltérés °	Párhuzam. eltérés mm	Nyomaték Nm
	Herny. csav.	Hasított				Min. B1	Min. B2	Max. B1&B2					
09	706.09	–	9.5	19.6	5.3	2.0	4.0	4.76	M2.5	M1.6	3	0.12	1.0
	–	707.09											
13	706.13	–	12.7	22.9	6.5	3.0	5.0	6.35	M3	M2	5	0.17	2.0
	–	707.13											
16	706.16	–	15.9	25.4	6.5	3.0	6.0	8.0	M4	M2.5	5	0.2	3.4
	–	707.16											
19	706.19	–	19.1	26.5	6.5	4.76	6.35	10.0	M4	M2.5	7	0.25	5.3
	–	707.19											
25	706.25	–	25.4	38.1	11.0	5.0	8.0	12.7	M5	M3	7	0.38	10.0
	–	707.25											
32	706.32	–	31.8	57.2	16.0	8.0	10.0	19.0	M6	M4	7	0.5	15.0
	–	707.32						16.0					
38	706.38	–	38.1	66.7	18.0	8.0	12.0	22.0	M6	M5	7	0.6	22.0
	–	707.38						19.0					
44	706.44	–	44.5	76.2	20.0	9.0	14.0	25.0	M6	M5	7	0.8	30.0
	–	707.44						22.0					
51	706.51	–	50.8	95.3	25.0	10.0	16.0	28.0	M8	M6	7	0.9	40.0
	–	707.51						26.0					
57	706.57	–	57.2	130.0	32.0	10.0	20.0	32.0	M8	M6	7	0.95	55.0
	–	707.57						30.0					
64	706.64	–	63.5	150.0	38.0	12.0	25.0	38.0	M8	M8	7	1.0	75.0
	–	707.64						36.0					

Anyag:

Tengelykapcsoló: Alumínium L 168 vagy magasabb minőség
Csavarzat: Acél ötvözet, fekete

Hőtartomány: –40°C to +120°C